


CHULA VISTA FIRE DEPARTMENT

FIRE PREVENTION DIVISION


Detail A - Single Occupant Building

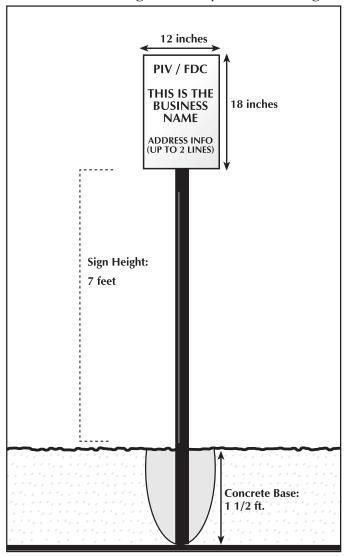

Sign Specifications

- Measurements MUST be exact and will be subject to a field inspection
- 2. Sign must be .080 gauge aluminum
- 3. Holes and radii must adhere to FHWA standards
- 4. Sign must be Type IV high intensity prismatic sheeting [H.I.P.]
- 5. Protective overlay film on sign [P.O.F.]

Detail B - Multiple Occupant Building

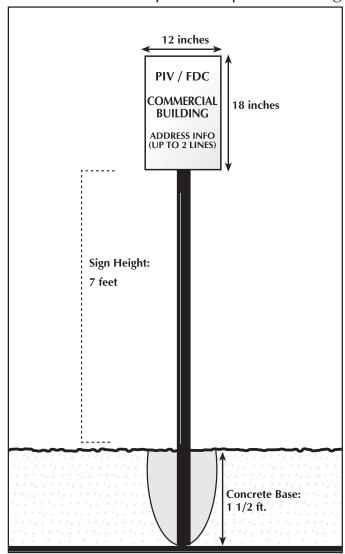

- 6. Sign support pole: schedule 40, 2-inch galvanized pipe
- 7. Sign must be buried in concrete base buried 1 1/2 feet deep
- 8. Signage letter height:
 - PIV/FDC and business name = 1 1/2 inches tall
- 9. White background with black lettering